

Complete informations on this form will enable us to design the best professional sail for Your boat.  
 If You have old sail, You can send it to us, or complete the measurement form of existing jib, You can find it on our website. If it's possible send us IRC or ORC certificate.  
 If any dimension is unclear to You, see the technical drawing included to the form.


Name, Surname:	Boat model:	Phone, eMail:
----------------	-------------	---------------

Type of sail:

- Inshore
- Offshore
- Racing
- genoa 110%
- genoa 130%
- genoa 150%

- 1 (cross cut)
- 2 (radial cut)
- 3 (membran sail)

Optional - preferred material:

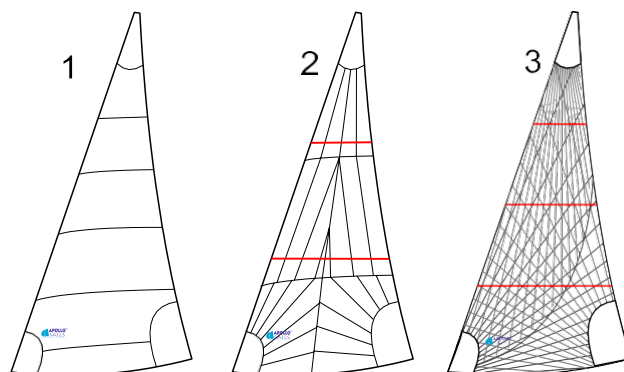


dimension „I”	Height of foretriangle. Measured from deck level (not mast step) along the forward edge of the mast to the intersection of the forestay and mast.	
dimension „J”	Base of the foretriangle. Measured from the front of the mast horizontally to the intersection of the forestay and deck.	
Maximum luff	Maximum distance between tack shackle (tack point) to the swivel shackle (head point). Fix the measurer edge to the jib halyard and hoist it maximum to the top.	








Forestay dimeter	
------------------	--

The yacht deck is not perfectly straight. Provide the difference between forestay attachment point and the shrouds attachment point to the water line. This dimension is called the <b>sheer line</b>	
M. dimension is difference between mast step and deck	

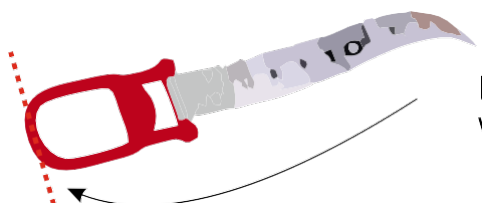


Dimensions has to be reported from the „0”. Use measurer with point zero on the outside edge.

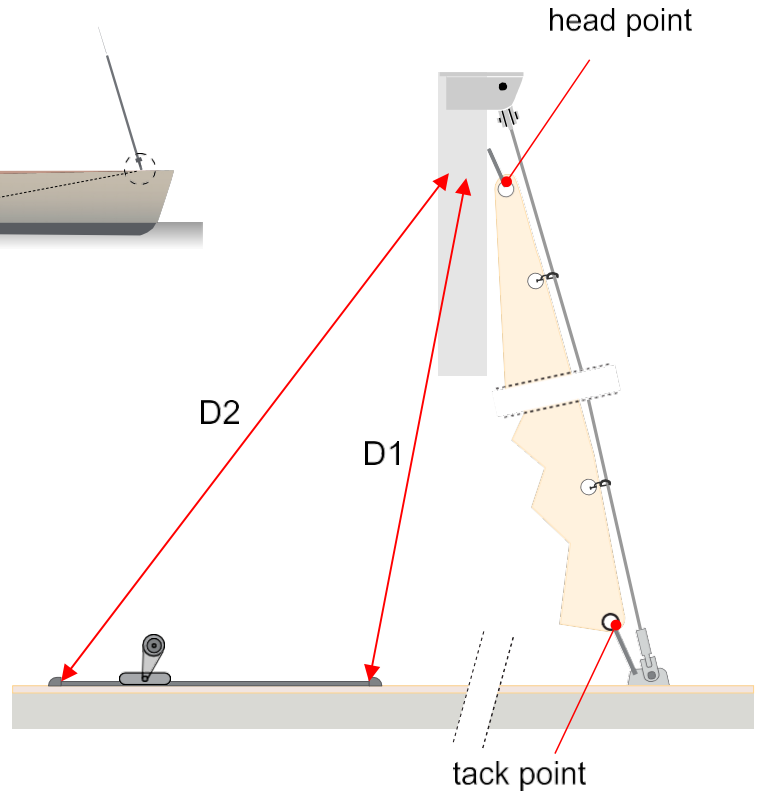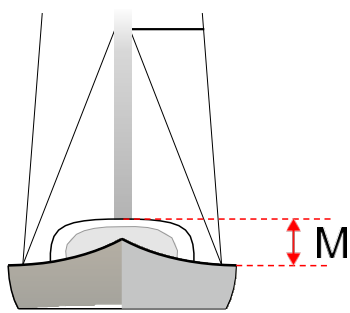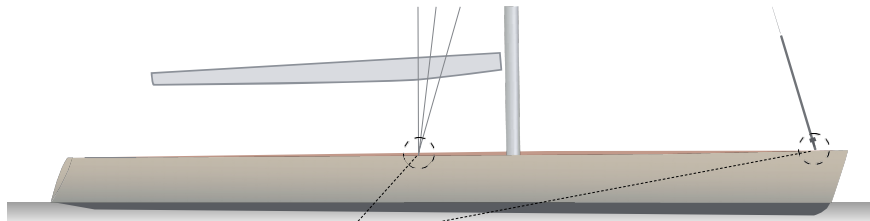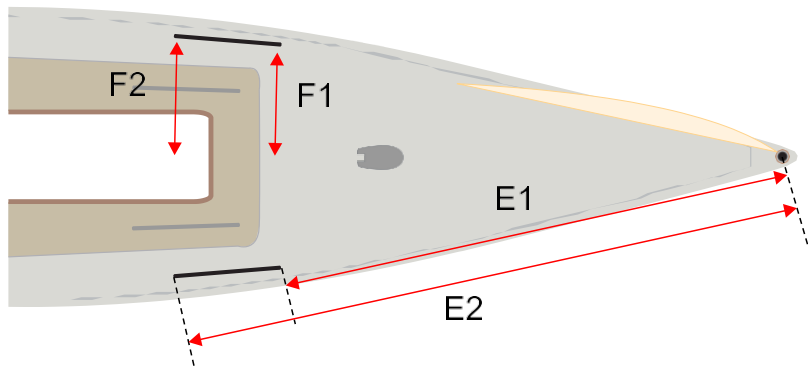

(the tack shackle should be set about 30 degrees from the forestay, during the measurements try to keep the shackle in this position)

Dimension from head point (with halyard hoisted maximum to the top) to front (D1) and end (D2) edge of clew traveler	D1	D2
Dimension from forestay attachment point to front (E1) and end (E2) edge of clew traveler	E1	E2
Dimension from boat centerline to front (F1) and end (F2) edge of clew traveler	F1	F2
Clew traveler <input type="radio"/> on the deck <input type="radio"/> on the roof of the cabin	If the clew travelers are on the roof of the cabin, how much higher than deck	

Notes (add Your special needs for Your sail):

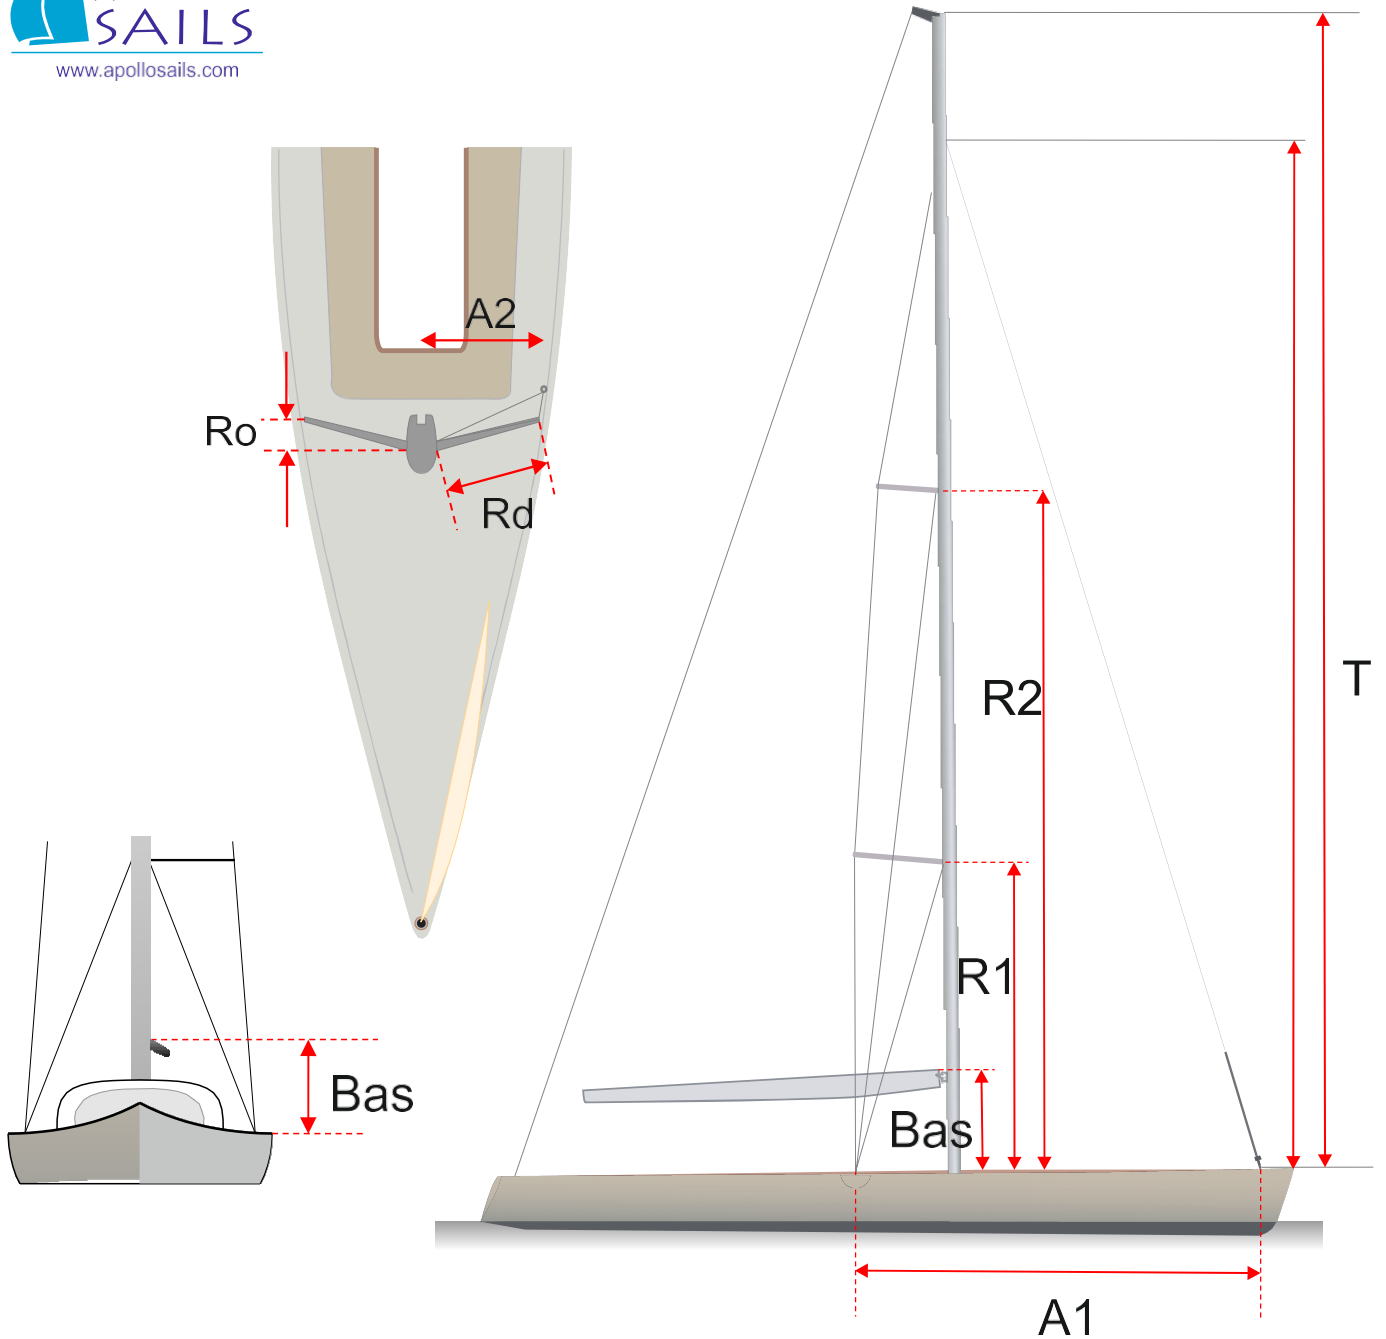

Rig type	masthead <input type="radio"/>		fractional <input type="radio"/>	
A1 (Distance between shroud attachment point and forestay attachment point)				
A2 (Distance between boat centerline to shroud attachment point)				
Bas (Distance between top edge of boom to deck - not mast step)				

Spreaders (from bottom)	Spreader 1 (R1)	Spreader 2 (R2)	Spreader 3 (R3)
height			
length (Rd)			
rake (Ro)			